


ADC.3... DIRECTIONAL CONTROL VALVES CETOP 3

SOLENOID OPERATED WITH REDUCED OVERALL SIZE



ADC.3.E...

"A09" DC COILS

CH. I PAGE 7

STANDARD CONNECTORS

CH. I PAGE 19

The ARON NG6 directional control valves are designed for subplate mounting with an interface in accordance with UNI ISO 4401 - 03 - 02 - 0 - 94 standard (ex CETOP R 35 H 4.2-4-03).

The use of solenoids with wet armatures allows an extremely safe construction completely dispensing with the need for dynamic seal. The solenoid tube is screwed directly onto the valve casting whilst the coil is kept in position by a ring nut.

The operation of the directional valve is electrical. The centring is achieved by means of calibrated length springs which, once the impulse is over, immediately reposition the spool in the neutral position. To improve the valve performance, different springs are used for each spool.

The solenoids, constructed with a protection class of IP65 in accordance with BS 5490 standards, are available in direct current form and different voltage. The electrical controls are equipped with an emergency manual control inserted in the tube.


The ADC.3 valve uses shorter solenoids than the standard AD.3.E to reduce the overall dimensions.

The solenoid coils are normally arranged for DIN 43650 ISO 4400 type connectors (standard version). On request, could be available the following coil connection variants: AMP Junior connections; flying leads connections, with or without integrated diode; Deutsch connections with bidirectional integrated diode.

The recommended fluids are hydraulic mineral based oils in accordance with DIN 51524 and it is recommended that filters should be fitted to ensure a maximum contamination level of class 10 in accordance with NAS 1638, $\beta_{25} \geq 75$.

Max. pressure ports P/A/B/T	250 bar
Max flow	30 l/min
Max excitation frequency	3 Hz
Duty cycle	100% ED
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max contamination level	class 10 in accordance with NAS 1638 with filter $\beta_{25} \geq 75$
Weight with one DC solenoid	1,25 Kg
Weight with two DC solenoids	1,5 Kg

PRESSURE DROPS

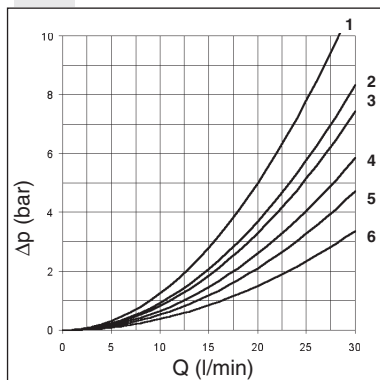

Spool type	Connections				
	P→A	P→B	A→T	B→T	P→T
01	4	4	4	4	
02	6	6	6	6	6
03	4	4	6	6	
04	3	3	2	2	5
15E-16E	6	3	1	5	
15F-16F	3	6	5	1	
	Curve No.				

The diagram at the side shows the pressure drop curves for spools during normal usage. The fluid used is a mineral oil with a viscosity of 46 mm²/s at 40 C°; the tests have been carried out at a fluid temperature of 40 C°. For higher flow rates than those in the diagram, the losses will be those expressed by the following formula:

$$\Delta p_1 = \Delta p \times (Q_1/Q)^2$$

where Δp will be the value for the losses for a specific flow rate Q which can be obtained from the diagram, Δp_1 will be the value of the losses for the flow rate Q₁ that is used.

1

ORDERING CODE

- ADC** Directional valve
- 3** CETOP 3/NG6
- E** Electrical operator
- **** Spool (tables at the side)
- *** Mounting (table 1)
- *** Voltage (table 2)
- **** Variants (table 3)
- 1** Serial No.

TAB.1 - MOUNTING

STANDARD	
C	
E	
F	
SPECIALS (WITH PRICE INCREASING)	
G	
H	

STANDARD SPOOL

* SPOOLS WITH PRICE INCREASING

TWO SOLENOIDS, SPRING CENTRED "C" MOUNTING			
Spool type		Covering	Transient position
01		+	
02		-	
03		+	
04*		-	

ONE SOLENOID, SIDE A "E" MOUNTING

Spool type		Covering	Transient position
01		+	
02		-	
03		+	
04*		-	
15		-	
16		+	

ONE SOLENOID, SIDE B "F" MOUNTING

Spool type		Covering	Transient position
01		+	
02		-	
03		+	
04*		-	
15		-	
16		+	

TAB.2 - A09 (27 W) COIL

DC VOLTAGE

L	12V	
M	24V	
N	48V*	
P	110V*	
Z	102V*	
X	205V*	
W	Without DC coils	

Voltage codes are not stamped on the plate, they are readable on the coils.

* Special voltage

TAB.3 - VARIANTS (**)

No variant (without connectors)	S1
Viton	SV
Emergency button	ES
Rotary emergency button	P2 (*)
Rotary emergency button (180°)	R5 (*)
Variant with lever for emergency button	LF
AMP Junior connection	AJ
Coil with flying leads (250 mm)	FL
Coil with flying leads (130 mm) with diode	LD
Deutsch connection with bidirectional diode	CX

Other variants relate to a special design


(*) **P2 and R5 Emergency** tightening torque **max. 6÷9 Nm / 0.6 ÷ 0.9 Kgm** with CH n. 22

(**) All variants are considered without connectors. The connectors must be order separately. See Ch. I Page 19

• The AMP Junior coil and with the flying leads (with or without diode) coils are available in 12V or 24V DC voltage only.

• The Deutsch coil with bidirectional diode is available in 12V DC voltage only.

LIMITS OF USE (MOUNTING C-E-F)





Spool type	n° curve
01	2
02	1
03	3
04	3
15-16	1(4*)

(4*) = 15 and 16 spools used as 2 or 3 way, follow the curve n°4

The tests have been carried out with solenoids operating temperature and a voltage 10% less than rated voltage with a fluid temperature of 50 C°. The fluid used was a mineral oil with a viscosity of 46 mm²/s at 40 degrees C. The values in the diagram refer to tests carried out with the oil flow in two directions simultaneously (e.g. from P to A and at the same time B to T).

In the cases where valves 4/2 and 4/3 are used with the flow in one direction only, the limits of use could have variations which may even be negative (See curve No 4 and Spool No 15-16). The tests were carried out with a counter-pressure of 2 bar at T port.

OVERALL DIMENSIONS

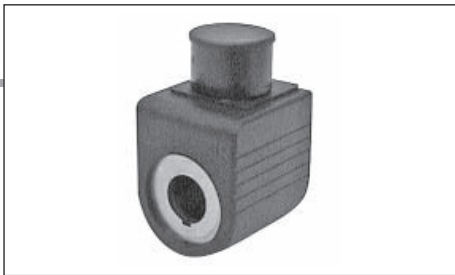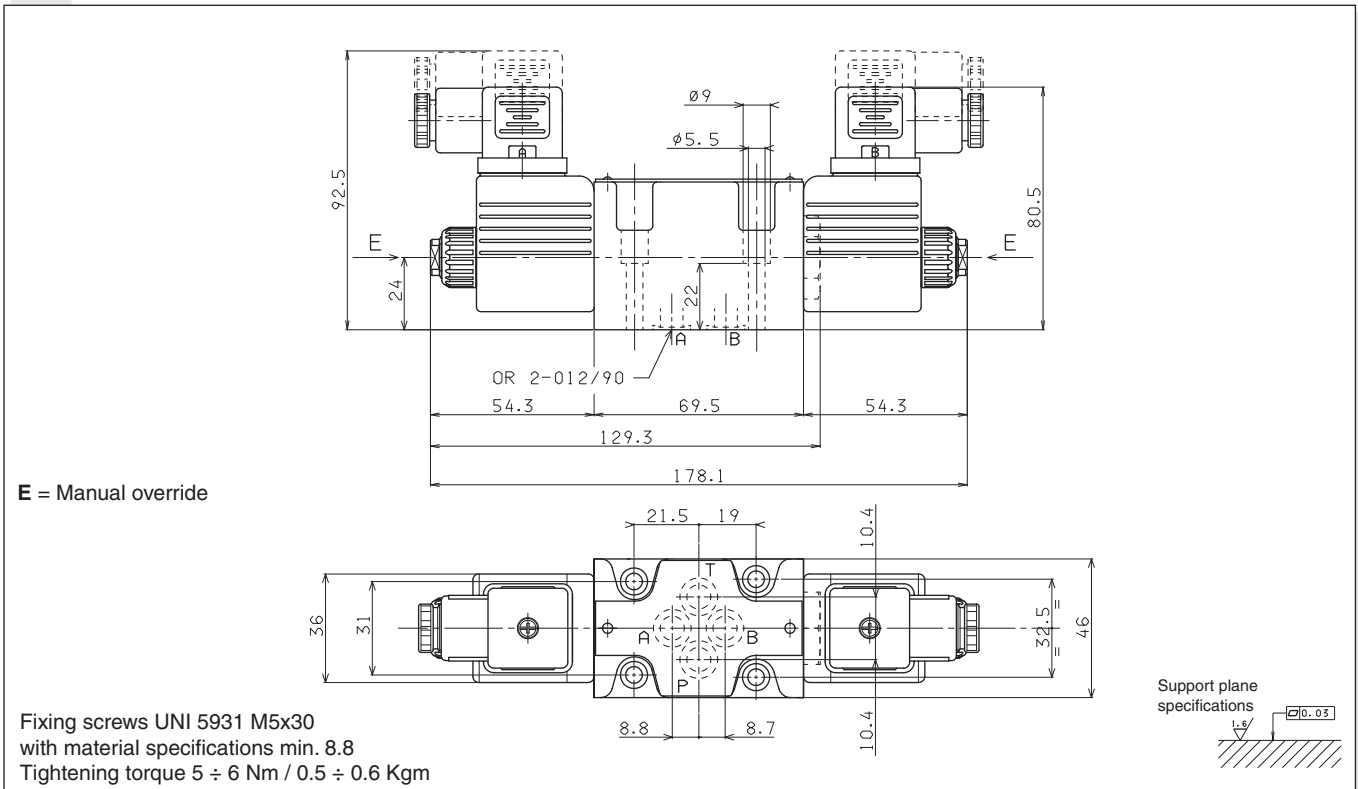

A09 DC COILS









Type of protection (in relation to connector used)	IP 65
Number of cycle	18.000/h
Supply tolerance	±10%
Ambient temperature	-30°C ÷ 60°C
Duty cycle	100% ED
Insulation class wire	H
Weight	0,215 Kg

- The AMP Junior coil and with the flying leads (with or without diode) coils are available in 12V or 24V DC voltage only.
- The Deutsch coil with bidirectional diode is available in 12V DC voltage only.


VOLTAGE (V)	MAX WINDING TEMPERATURE (AMBIENT TEMPERATURE 25°C)	RATED POWER (W)	RESISTANCE AT 20°C (OHM) ±7%
12V	123°C	27	5.3
24V	123°C	27	21.3
48V*	123°C	27	85.3
102V*	123°C	27	392
110V*	123°C	27	448
205V*	123°C	27	1577

* SPECIAL VOLTAGES

ETA09 - 04/2001/e

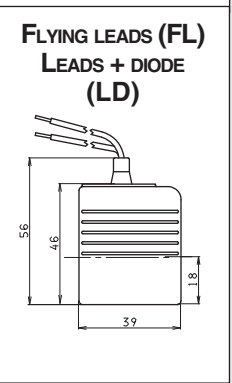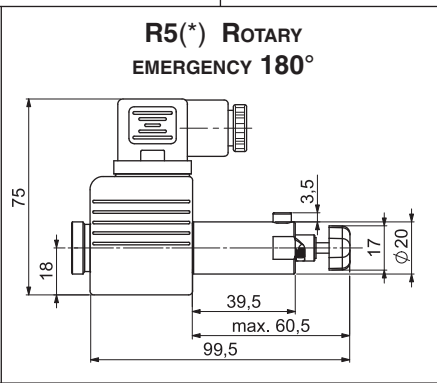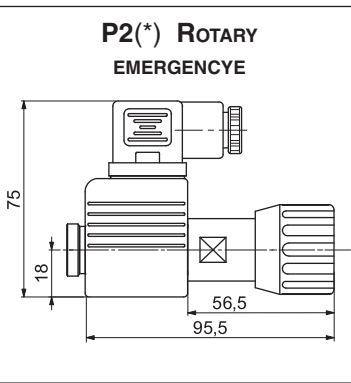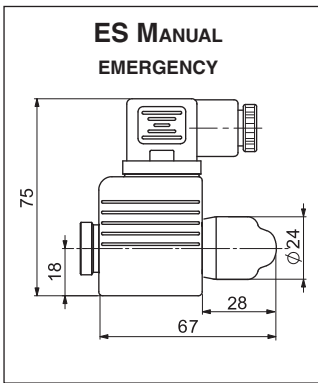

(*) P2 and R5 Emergency tightening torque max. 6÷9 Nm / 0.6 ÷ 0.9 Kgm with CH n. 22

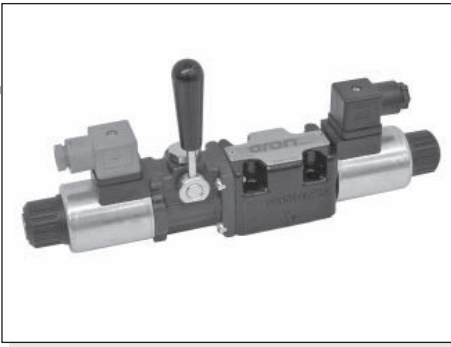

“LE” VARIANT - EMERGENCY CONTROL LEVER FOR DIRECTIONAL CONTROL VALVES (ADC/AD.3.E)

The emergency control lever for solenoid valves by Aron, represents a develop in terms of safety and flexibility among applied hydraulic components.

Thanks to his flexibility, the component was designed to be inserted between the valve body and the spool, providing total interchangeability between the different types of solenoid body valves manufactured by Aron. It is compatible with the standard CETOP 3 and stackable valves with threaded connections –G3/8” or 9/16-18UNF (SAE 6). The component is available for both directional control and proportional valves (for the last type of control please consult our Technical Department)

As an emergency lever applied to solenoid valves, the control can be used as a safety device in conformity with the industry standards, also playing an useful role in the event of power cuts. The control can be used in agricultural and mobile fields; the manual action can be used to carry out periodic maintenance work on mobile components of the vehicle, in perfectly safe working conditions.

Max operating pressure port T:	
dynamic	160 bar
static	210 bar

Max operating pressure port P for series connection configuration	160 bar
---	---------

- **MOUNTING TYPE: C / F / H**
- **SPOOLS TYPE: 01/02/03*/04/16/17/66**

* The spool 03 is allowed only on AD3E. Not permitted with ADC3

HYDRAULIC SIMBOL



MOUNTING COMPATIBILITY

CODE VALVE	DESCRIPTION	COIL	VOLTAGE
ADC.3...	Directional control valve	A09	27 W
AD.3.E...	Directional control valve	D15	30 W

OVERALL DIMENSION

