


DCV 30

PORTATA
FLOW

40 l/min
10.6 GPM

PRESSIONE MAX
MAX PRESSURE

350 BAR
5075 PSI

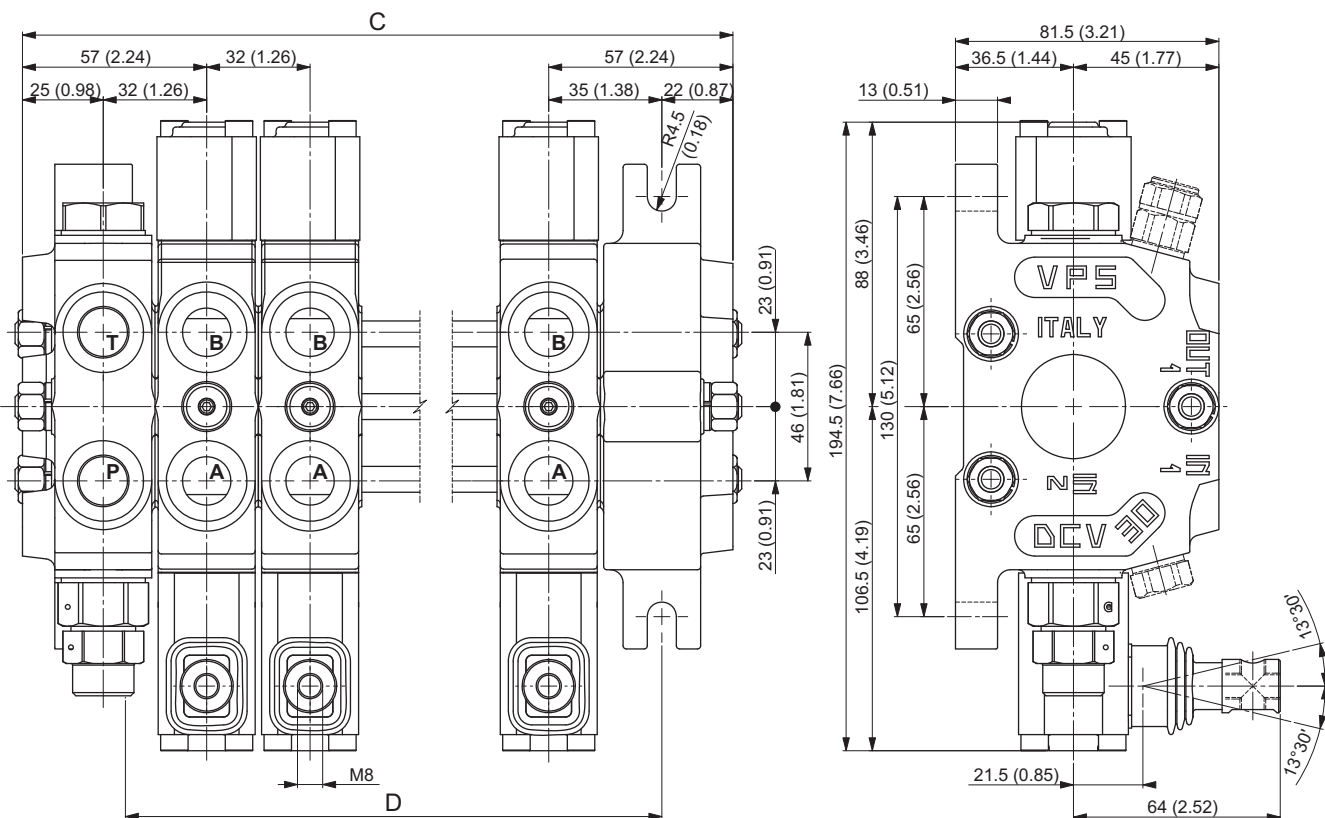

Coppia di serraggio dei tiranti
Tie-rod tightening torque

35 Nm

(...) = inches

DISTRIBUTORE TIPO TYPE OF VALVE	QUOTE VARIABILI - VARIABLE DIMENSIONS					
	C		D		PESO - WEIGHT	
	mm	inc	mm	inc	kg	lb
DCV 30/1	114	4.49	70	2.76	4.70	10.34
DCV 30/2	146	5.75	102	4.02	6.40	14.08
DCV 30/3	178	7.01	134	5.28	8.10	17.82
DCV 30/4	210	8.27	166	6.54	9.80	21.56
DCV 30/5	242	9.53	198	7.80	11.50	25.30
DCV 30/6	274	10.79	230	9.06	13.20	29.04
DCV 30/7	306	12.05	262	10.31	14.90	32.78
DCV 30/8	338	13.31	294	11.57	16.60	36.52
DCV 30/9	370	14.57	326	12.83	18.30	40.26
DCV 30/10	402	15.83	358	14.09	20.00	44.00
DCV 30/11	434	17.09	390	15.35	21.70	47.74
DCV 30/12	466	18.35	422	16.61	23.40	51.48